



Module No. 617

READING THE DISPLAY

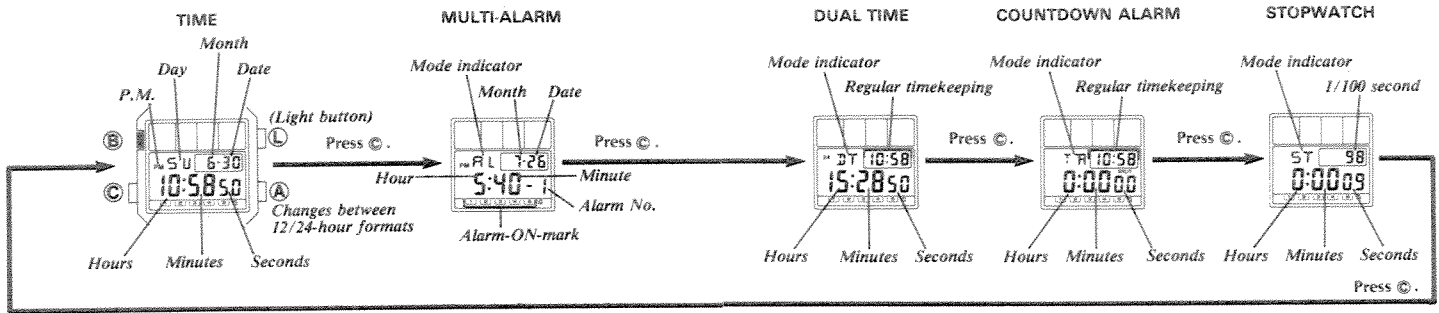

The watch reverts to TIME if C is pressed after operating in any display.

SETTING TIME AND DATE

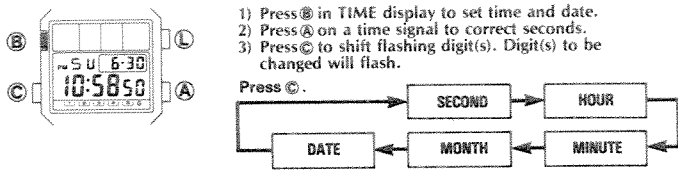

- 1) Press C in TIME display to set time and date.
- 2) Press A on a time signal to correct seconds.
- 3) Press C to shift flashing digit(s). Digit(s) to be changed will flash.

- 4) Each press of A increments digit. Keep pressed to change at high speed.
- 5) Press C to complete setting.

Auto-retrieve function
Display automatically returns to TIME if no button is pressed for a few minutes.

SETTING DUAL TIME

- 1) Press C in DUAL TIME to set new time.
- 2) Each press of A increments digit. Keep pressed to change at a high speed.
- 3) Press C to shift flashing digit(s). Digit(s) to be changed will flash.



- 4) Press C to complete.

OPERATING COUNTDOWN ALARM

Countdown can be set from 1 second to 24 hours (display shows 0:00 00), and times to an accuracy of one second. Start/stop operation is possible by pressing A and is confirmed by a signal. When display reaches zero, beeper will sound for 10 seconds unless any button is pressed.

Setting countdown alarm time

- 1) Press C in COUNTDOWN ALARM to set new time.
- 2) Each press of A increments digit. Keep pressed to change at a high speed.
- 3) Press C to shift flashing digit(s). Digit(s) to be changed will flash.



- 4) Press C to complete.

Repeat function

Pre-entered time is retrieved, when display reaches zero.

Auto-retrieve function

Display automatically returns to initial COUNTDOWN ALARM display if left unused for a few minutes.

OPERATING STOPWATCH

Mode indicator 1/100 second




A signal confirms start/stop operation. (Working range) Total elapsed time display is limited to 23 hours 59 minutes 59.99 seconds. For longer times reset and start again.


a) Net time measurement



b) Split time measurement



c) 1st-2nd place times




OPERATING MULTI-ALARM

Five alarm times can be set independently. Each alarm can be used in 4 different ways. Daily alarm, Monthly alarm, Daily alarm for 1-month period or Date alarm. Beeper sounds for 20 seconds at preset time when alarm is activated. Press any button to stop beeper. Signal sounds every hour on the hour if time signal is set. (Sound demonstration) Press and hold B in any ALARM display to sound beeper.

Presetting alarm time

- 1) Press B in ALARM to select an Alarm No.

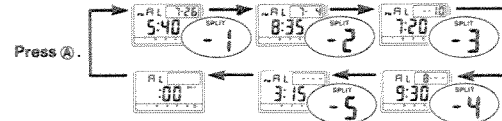

- 2) Press B to set alarm time.
- 3) Press C to shift flashing digit(s). Digit(s) to be changed will flash.



- 4) Each press of A increments digit. Keep pressed to change at high speed.
- 5) Press C to complete.

* Alarm time is displayed in 24-hour system when timekeeping is in 24-hour system.

Auto-retrieve function

Display automatically returns to initial ALARM display if left unused for a few minutes.

Four types of alarms

| | | | |
|---------------|--|------------------------|---|
| Daily alarm | | Month and date not set | Beeper sounds at preset time every day |
| Monthly alarm | | Only date set | Beeper sounds on preset date and time once every month |
| 1 month alarm | | Only month set | Beeper sounds at preset time every day during the set month |
| Date alarm | | Month and date set | Beeper sounds at preset time, month and date |

ON or OFF setting of alarm

In each ALARM display, press B to activate/deactivate alarm. The alarm-ON-mark () appears when alarm is activated.

ON or OFF setting of hourly time signals

In HOURLY TIME SIGNAL display, press B to activate/deactivate hourly time signal. The hourly time signal mark () appears when it is activated.